

Exterior Manufactured Articles prepainted steel

Revision 12 December 2013

This literature supersedes all previous issues



Prepainted - PP

GENERAL DESCRIPTION

Exterior Manufactured Articles prepainted steel, specifically designed by BlueScope Steel Limited to provide a cost effective product with outdoor durability and formability.

TYPICAL USES

Air conditioner panels, garden sheds. For material selection advice, please contact BlueScope Steel Direct.

AUSTRALIAN STANDARDS

Substrate - AS 1397

Paint Coating - AS/NZS 2728 Type 3


PREFERRED SUBSTRATES

ZINCALUME® G550S AM100 steel with Activate™ technology

ZINCALUME® G300S AM100 steel with Activate™ technology

ZINCFORM® G300S Z275 steel {Refer Note 7}

Please refer to current price list or BlueScope Steel Limited State Sales Office for availability of colours and dimensions.

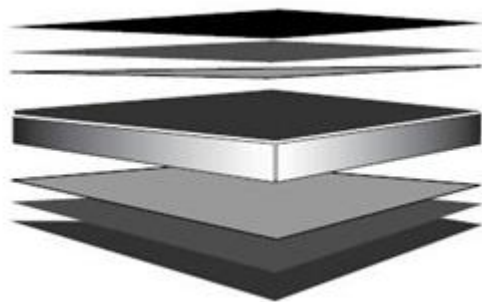

CORSTRIP® protective film may be available on request {Refer Note 2}

- ← Finish Coat (Finish Coat + Primer = nominal 25µm) {Refer Notes 3 & 4}
- ← Universal Corrosion Inhibitive Primer
- ← Conversion Coating
- ← ZINCALUME®- Zinc/Aluminium alloy coated steel with Activate™ technology Substrate (can be galvanised)
- ← Conversion Coating
- ← Universal Corrosion Inhibitive Primer
- ← Backing Coat (Backing Coat + Primer = nominal 10µm total){Refer Note 5}

ATTRIBUTES TESTED DURING MANUFACTURE

| Property | Test & Evaluation Method(s) | Results |
|----------------|---|---------------------------|
| Adhesion | | |
| Reverse Impact | AS/NZS 2728 (App. E) | ≥10 joules |
| T-bend | AS/NZS 2728 (App.F) | Maximum 6T. Refer Note 6. |
| Hardness | | |
| Pencil | AS1580.405.1 | HB or harder |
| Specular gloss | | |
| 60° meter | AS/NZS 1580.602.2; ASTM D523 (test & eval.) | Nominal ± 10 units |

Australia 1800 800 789

COLORBOND®, COLORBOND® Permagard®, COLORBOND® Coolmax®, AQUAPLATE®, CORSTRIP®, WHITEHAVEN™, BRITIEWITE™, DRUMSTOCK® and BlueScope are trade marks of BlueScope Steel Limited ABN 16 000 011 058.

Please ensure you have the current data sheet for this product as displayed at steelproducts.bluescopesteel.com.au



Exterior Manufactured Articles prepainted steel

Revision 12 December 2013

This literature supersedes all previous issues



Prepainted - PP

PRODUCT ATTRIBUTES

| Property | Test & Evaluation Method(s) | Results |
|---|--|---|
| Flexibility | | |
| T-bend | ASTM D4145 | Maximum 10T (no cracking). Refer Note 6. |
| Resistance to abrasion | | |
| Scratch | AS/NZS 2331.4.7 (test & eval) | Typically 2000g |
| Resistance to humidity | | |
| Cleveland (500 hours) | ASTM D4585; AS/NZS 1580.481.1.9 (Blisters); AS/NZS 1580.408.4 (Adhesion) | Blister density: ≤ 3 . Blister size: $\leq S2$. No loss of adhesion or corrosion. |
| Resistance to corrosion | | |
| Salt spray (500 hours) | AS/NZS 2728 (App. I); ASTM B117; AS 2331.3.1; AS/NZS 1580.481.1.9 (Blisters); AS/NZS 1580.408.4 (Adhesion) | Blister density: ≤ 2 . Blister size: $\leq S3$. Undercut from score: ≤ 2 mm. No loss of adhesion or corrosion. Refer Note 1. |
| Kesternich (SO ₂) (50 cycles) | DIN 50018 | Edge creep: < 4 mm. Refer Note 1. |
| Resistance to colour change | | |
| Natural well washed exposure (10 yrs) | AS/NZS 1580.457.1 & ASTM D2244 (Colour) | ΔE cielab 2000: Light colour: ≤ 6 units. Intermediate colour: ≤ 9 units. Dark colour: ≤ 15 units. Refer Notes 8 & 9. |
| QUV (2000 hours) | ASTM G154 & ASTM D2244 (Colour) | ΔE cielab 2000: Intermediate colour: ≤ 6 units. |
| Resistance to chalking | | |
| Natural well washed exposure (10 yrs) | AS/NZS 1580.457.1 & AS/NZS 1580.481.1.11 (Chalk Method B) | Chalk rating: ≤ 4 . Refer Notes 8 & 9. |
| QUV (1000 hours) | ASTM G154 & AS/NZS 1580.481.1.11 (Chalk Method B) | Chalk rating: ≤ 4 . |
| Resistance to Solvents | | |
| Exposure | ASTM D1308 (3.1.1); ASTM D2244 (Colour); AS/NZS 1580.481.1.9 (Blisters) | No discolouration or blistering. Refer Notes 8 & 10. |
| Resistance to acids | | |
| Exposure | ASTM D1308 (3.1.1); ASTM D2244 (Colour); AS/NZS 1580.481.1.9 (Blisters) | No discolouration or blistering. Refer Notes 1 & 10. |
| Resistance to alkalis | | |
| Exposure | ASTM D1308 (3.1.1); ASTM D2244 (Colour); AS/NZS 1580.481.1.9 (Blisters) | No discolouration or blistering. Refer Notes 1 & 10. |
| Resistance to fire | | |
| Exposure | AS/NZS 1530.3 (test & eval.) | Ignitability index: 0 rating in scale of 0-20 Spread of flame index: 0 rating in scale of 1-10 Heat evolved index: 0 rating in scale of 0-10 Smoke evolved index: 0-1 rating in scale of 0-10. |
| Resistance to heat | | |
| Exposure 100°C continuous (500 hrs) | ASTM D2244 (Colour) Colour change: ΔE cielab 2000: ≤ 3 units. | Colour change: ΔE cielab 2000: ≤ 3 units. |

Australia 1800 800 789

COLORBOND®, COLORBOND® Permagard®, COLORBOND® Coolmax®, AQUAPLATE®, CORSTRIP®, WHITEHAVEN™, BRITOWHITE™, DRUMSTOCK® and BlueScope are trade marks of BlueScope Steel Limited ABN 16 000 011 058.

Please ensure you have the current data sheet for this product as displayed at steelproducts.bluescopesteel.com.au



Exterior Manufactured Articles prepainted steel

Revision 12 December 2013

This literature supersedes all previous issues



Prepainted - PP

Australia 1800 800 789

COLORBOND®, COLORBOND® Permagard®, COLORBOND® Coolmax®, AQUAPLATE®, CORSTRIP®, WHITEHAVEN™, BRITWITE™, DRUMSTOCK® and BlueScope are trade marks of BlueScope Steel Limited ABN 16 000 011 058.

Please ensure you have the current data sheet for this product as displayed at steelproducts.bluescopesteel.com.au



Exterior Manufactured Articles prepainted steel

Revision 12 December 2013

This literature supersedes all previous issues



Prepainted - PP

IMPORTANT NOTES

- 1 Product may not be suitable if it is intended to use Exterior Manufactured Articles prepainted steel in an exterior application within 1km of salt marine locations, severe industrial or abnormally corrosive environments; in areas not washed by rain, or in applications where it will be wholly or partly buried in the ground. For selection of the most appropriate COLORBOND® steel product, please refer to Technical Bulletins TB1a, TB1b, CTB16, CTB21 and CTB22. Before purchase, you should check on suitability by visiting the BlueScope Steel website or by contacting BlueScope Steel Direct for advice.
- 2 The CORSTRIP® protective film should be removed from the painted steel strip immediately on installation. Sunlight can increase adhesion of the protective film to the painted surface if left uncovered outside.
- 3 Finish Coat - the coating applied to the exposed surface of the prepainted coil which is expected to meet the Performance Requirements.
- 4 A range of Finish Coat gloss levels between 10 and 80 units (60°) may be available.
- 5 Backing coat - a thin coating applied to the reverse surface of the prepainted coil. It also gives additional durability to the reverse surface during the service life of the product. For aesthetic reasons the Backing Coat is not recommended for exposure to direct sunlight.
- 6 The minimum internal bend diameters for forming processes to achieve no paint cracking (visible using x10 magnification) and to avoid paint adhesion issues are specified by the T-bend flexibility and T-bend adhesion results respectively- where 1T equals the total coated thickness (tct) in mm of the material. These results are based on testing at 20-25°C.
- 7 For most products, the metallurgical ageing process which is inherent in the paint stoving cycle will result in some loss of ductility compared with unpainted product. However, minimum strength levels designated by relevant standards will still be applicable.
- 8 Improper storage or use of non-approved roll-forming lubricants may cause brand transfer and paint blushing, and may adversely affect colour and long term durability. Product in coil or sheet pack form must be kept dry. If the coil or sheet pack becomes wet, it must be separated and dried (refer AS/NZS 2728 Appendix L, and also Technical Bulletin TB7). Contact Steel Direct to obtain advice on appropriate rollforming lubricants.
- 9 Values quoted are for panels exposed in accordance with AS/NZS 2728. Variations for in-situ performance may occur due to complexity of building design and location.
- 10 Exterior Manufactured Articles prepainted steel has good resistance to accidental spillage of solvents such as methylated spirits, white spirit, mineral turpentine, toluene, trichloroethylene and dilute mineral acids and alkalis. However, all spillages should be immediately removed by water washing and drying.

Australia 1800 800 789

COLORBOND®, COLORBOND® Permagard®, COLORBOND® Coolmax®, AQUAPLATE®, CORSTRIP®, WHITEHAVEN™, BRITEWITE™, DRUMSTOCK® and BlueScope are trade marks of BlueScope Steel Limited ABN 16 000 011 058.

Please ensure you have the current data sheet for this product as displayed at steelproducts.bluescopesteel.com.au

